

3 Cable Protection Pipe Qualities

1 Supplier

Böhmm

Böhm

Cable Protection Pipe

plus

DIN 16873

PVC-U 100% New Material

Version

- Single layer pipe
- 6,0 m Ready lengths
- Sealing- or solvent welded socket
- DN 50 up to DN 160
- Also available with HB-Fix Seal
- Colour Black

Tests

- Partial test by SKZ / MPA
- Company Standard
- Test Certificate
- In conformity with DIN 8061 / 62

Böhm

Cable Protection Pipe

basic

DIN 16873

PVC-U New Material / Recycling Material

Version

- Single layer pipe
- 6,0 m Ready lengths
- Sealing- or solvent welded socket
- DN 50 up to DN 160
- Also available with HB-Fix Seal
- Colour Black

Tests

- Partial test by SKZ / MPA
- Company Standard
- Test Certificate
- In conformity with DIN 8061 / 62

Böhm

Protection Pipe

standard

DIN 16875

PVC-U 100% Regrind Material


Version

- Single layer pipe
- 6,0 m Ready lengths
- Sealing- or solvent welded socket
- DN 50 up to DN 160
- Also available with HB-Fix Seal
- Colour Black

Tests

- Company Standard
- Test Certificate


Cable Protection and HB-Fix

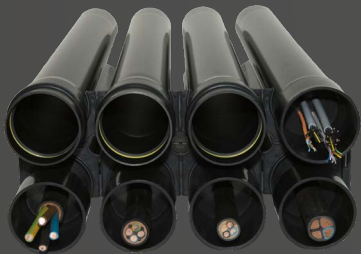

Cable Protection Pipe *plus* DIN 16873

Cable Protection Pipe *basic* DIN 16873

Protection Pipe *standard* DIN 16875



HB-Fix Seal

Alternatively, we deliver all Böhm cable protection pipes and molded parts with HB-Fix Seal!

Cable Protection Bend *plus*



DIN 16873

PVC-U 100% New Material

Version

- Single layer pipe
- Radius 0,5 m to 50 m available
- Angles 11°, 15°, 22°, 30°, 45°, 60°, 90°
- Sealing- or solvent welded socket
- DN 50 up to DN 160
- Also available with HB-Fix Seal
- Colour Black

Tests

- Partial test by SKZ / MPA
- Company Standard
- Test Certificate
- In conformity with DIN 8061 / 62

Cable Protection Fittings *plus*



DIN 16873

PVC-U 100% New Material

Version

- Single layer pipe
- Double socket for adhesive jointing
- Pipe Socket
- Double sealing socket
- Also available with HB-Fix Seal
- Colour Black

Tests

- Partial test by SKZ / MPA
- Company Standard
- Test Certificate
- In conformity with DIN 8061 / 62

BoehmSpacer® *compact*



Version

- BoehmSpacer® *compact*
For smooth-walled pipe systems
- Dimensions DN 45 - DN 200
- PP Polypropylen
- Colour Black

Tests

- Company Standard

Original
BoehmSpacer®
since 1976
also on YouTube


BoehmSpacer® *ultra*



Version

- BoehmSpacer® *ultra*
For corrugated composite pipe systems as well as smooth-walled pipe systems
- Dimensions DN 110, DN120, DN 125, DN 160
- Wide contact surface
- PP Polypropylen
- Colour Black

Tests

- Company Standard

BoehmSpacer® *triple*



Version

- BoehmSpacer® *triple*
For corrugated composite pipe systems as well as smooth-walled pipe systems
- Dimensions DN 160 und DN 200
- Wide contact surface
- PP Polypropylen
- Colour Black

Tests

- Company Standard


Cable Protection Split Duct



Version

- PVC-Single layer pipe
- DN 50 - DN 160
- Colour Black, Gray
- With H-Profil
- DN 110 with snap lock

Cable Cover Plate

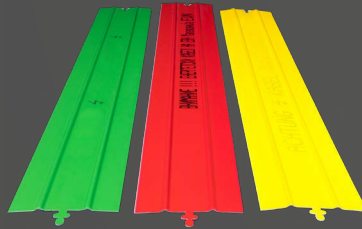

Version

- From PVC
- Plate length 1 m
- Panel thickness 2 mm
- Plate width 120 mm, 150 mm, 170 mm, 200 mm, 250 mm, 300mm

Accessories



Accessories

- Pull wire
- Guiding Rope
- UNIKA Caps
- PVC-Glue, Solvent, Cleaner
- Lubricant
-

Cable Protection Specialist

BOHMTEC

Böhm GmbH

Bei den Friedenseichen 19
95158 Kirchenlamitz

Tel. +49 9285 953-0
Fax +49 9285 6440
Mail zentrale@boehmtec.com
Web www.boehmtec.com